

Mechanical temporized energy saving device:

- Generates a significant reduction in power consumption.
- Mechanically operated with any type of card.
- Timed courtesy light; cuts the electric circuits after a 45 second delay.
- Stand-alone (no wiring required).
- LED light for easy location in the dark.
- For wall surface installation (no flush mount).

Weight: 185gr
 Dimensions: 132 x 97 x 35 mm (H x W x D)
 Box material: White ABS colour
 Fire resistant BG3(H) according to UL94 V-0 standard
 Packing: Plastic bag

Power Consumption: Nominal 10mA, Max. 20mA

Power Supply:

Voltage: 110 or 230 Vac. Tolerance 10%


Frequency: 50-60Hz

Output Relay: 1 Relay


Power cut-off: 12A, 230V~,cos φ = 1
 8A, 230V~,cos φ = 0,6

Incandescent Max. Load: 10A

Halogen Max. Load: 10A

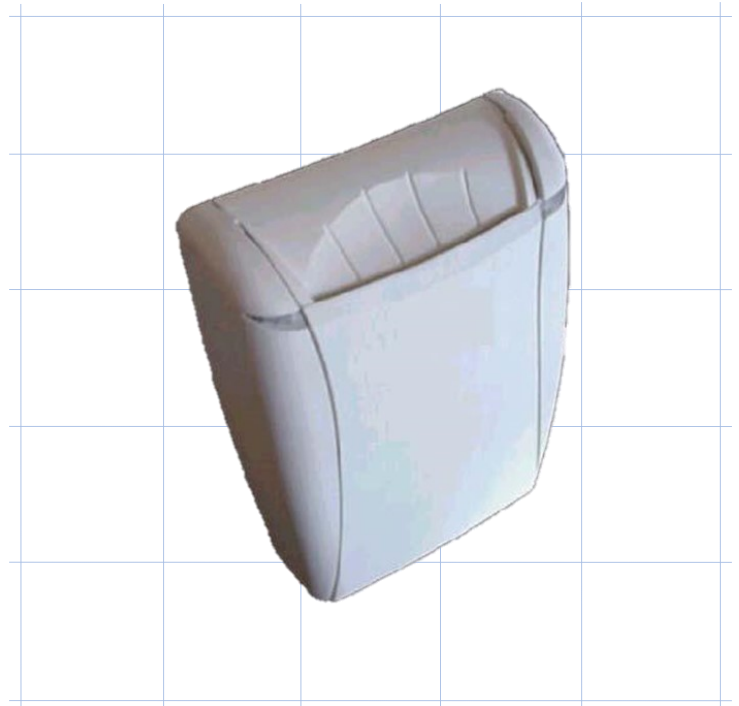

Connections Diagram

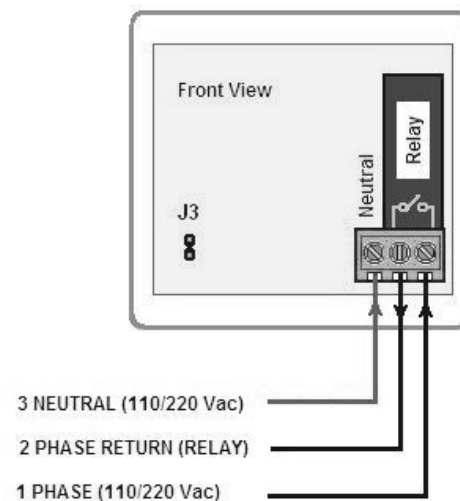

IMPORTANT: Halogen, electronic fluorescent and low consumption lamps present a very high consumption (up to 20Amp) at switch-on and switch-off time, rapidly damaging relay contacts. If this type of lamps are being used, Onity recommends to use a contactor.